
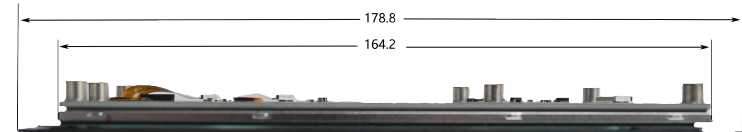
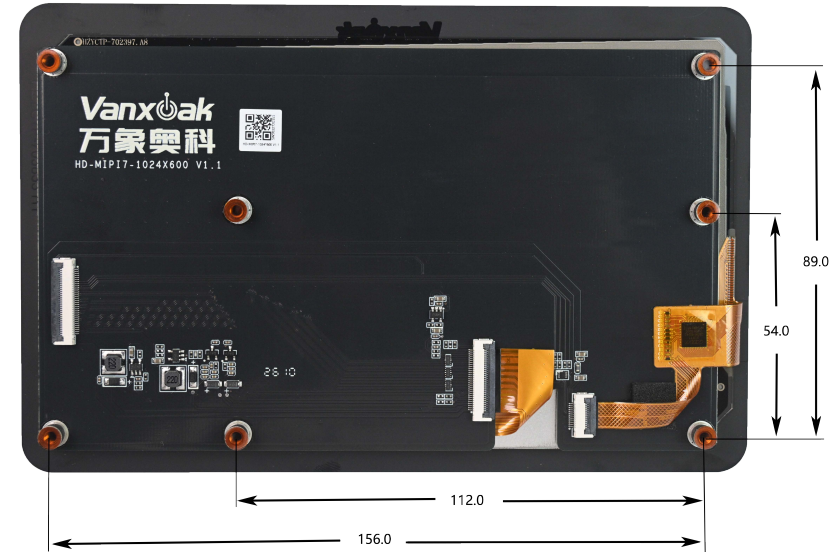


32P DESCRIPTION

PIN	SIGNAL
1	GND
2	GND
3	NC
4	NC
5	NC
6	NC
7	TOU_RST
8	TOU_INT
9	TOU_SDA
10	TOU_SCL
11	GND
12	MIPI_DSI_D3P
13	MIPI_DSI_D3N
14	GND
15	MIPI_DSI_D2P
16	MIPI_DSI_D2N
17	GND
18	MIPI_DSI_CLKP
19	MIPI_DSI_CLKN
20	GND
21	MIPI_DSI_D1P
22	MIPI_DSI_D1N
23	GND
24	MIPI_DSI_D0P
25	MIPI_DSI_D0N
26	GND
27	LCD_BRIGHT
28	LCD_PWREN
29	VCC3P3
30	VCC3P3
31	VDD50
32	VDD50

# HD-MIPI7-1024x600 V1.0 电容屏

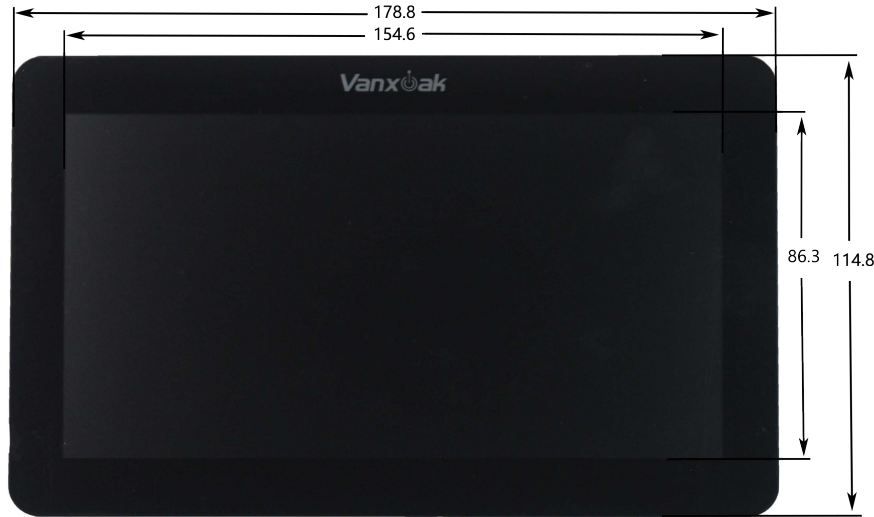

Item	Contents
屏幕类型	TFT matrix
接口类型	MIPI(4 Lane)
电源电压	5V
控制电压	3.3V
背光电流	180mA
背光亮度	350 cd/m2
显示尺寸	7.0 inch
屏幕尺寸	154.2*85.9
像素点	1024*600
触摸型号	GT911

Title		
武汉万象奥科电子有限公司		
Size A	Document Number HD-MIPI7-1024X600 V1.0 电容屏	Rev 1.0
Date:	Tuesday, May 26, 2026	Sheet 1 of 1